


199.00 EUR  
incl. 19% VAT, plus [shipping](#)

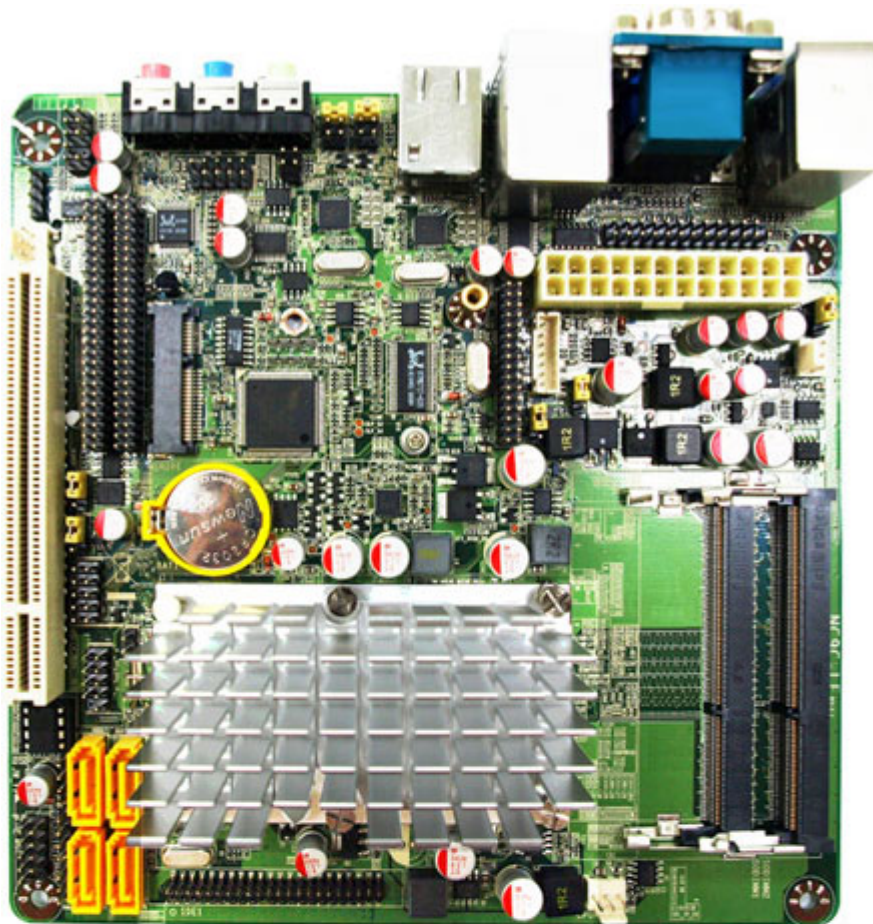

CARTFT.COM

Support:  [Specifications \[EN\]](#)

- INTEL® Pineview-M + NM10 Chipset
- Support INTEL®ATOM N550 Dual-Core (1.50GHz) CPU
- Support 3Gb/s SATA■ with RAID 0, 1 and JBOD
- Supports 2 \* Gigabit LAN

- Integrated VIA VT1705 HD Audio Code with 6-Channel
- Support Watch dog Technology
- Compliance with ERP standard
- Mini-ITX Form Factor(170mm x 170mm)
- Support Daughter board Expansion
- **CPU**
  - INTEL ®Atom Dual-Core N550 CPU(45nm,FSB 667MHz,1.50GHz,512KB\*2 L2 Cache)
  - INTEL®Atom N550 + NM10 chipset
  - Build-in INTEL®GMA 3150 Graphics Core (DVM T Max. 384MB)
  - 2 \* SO-DIMM Sockets for un-buffered Single Channel DDR3 800 SDRAM up to 2 GB
- **Chipset**
- **Memory**
- **Expansion Slots**
- **Storage**
- **Audio**
- **Ethernet LAN**
- **USB**
- **Special Features**
- **LVDS**
- **Rear Panel I / O**
- **Internal I / O**
- **BIOS**
- **Functional**
- **Packing**
- **Certificate**
- **Temperature**
- **Form Factor**
- INTEL ®Atom Dual-Core N550 CPU(45nm,FSB 667MHz,1.50GHz,512KB\*2 L2 Cache)
- INTEL®Atom N550 + NM10 chipset
- Build-in INTEL®GMA 3150 Graphics Core (DVM T Max. 384MB)
- 2 \* SO-DIMM Sockets for un-buffered Single Channel DDR3 800 SDRAM up to 2 GB
- 1 \* PCI slot
- 1 \* Mini PCI-E socket
- 4 \* Serial ATA2 3Gb/s connectors support RAID 0, 1, JBOD
- 1 \* IDE connector
- VIA VT1705 HD Audio Code with 6-Channel
- Realtek RTL8111E PCI-E Gigabit Ethernet LAN
- Embedded 7 \* USB 2.0/1.1
- Support ACPI S3
- Support CPU Smart FAN & DC FAN
- Onboard 18-bit Single Channel LVDS connector
- 4 \* USB 2.0/1.1 ports
- 1 \* PS/2 KB/MS connector
- 2 \* RJ-45 port
- 1 \* Audio I/O port ( Line-in, MIC and Line-out )
- 1 \* VGA port
- 1 \* COM port
- 3 \* USB 2.0 ports
- CPU / Chassis Fan connectors
- 1 \* 24-pin ATX Power connector
- 1 \* COM header ( COM2 for RS-232/422/485)
- 1 \* AUDIO\_IN header
- 1 \* Parallel header
- 1 \* GPIO header
- Award 8MB DIP-SPI Flash ROM
- ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation, Financial Application
- Color Box Dimension■200(W) x 200(D) x 70(H)mm
- Cases Gross Weight■15.4KGS
- Cases Net Weight■10.3KGS
- 20 PCS / Cases, Case size : 720(L) x 410(W) x 200(H)mm
- CE, FCC, RoHS
- Operating within 0~60 centigrade (**Suggest to use system FAN**)
- Storage within -20-85 centigrade
- Mini ITX Form Factor(170mmx170mm)

**Product Accessories**

- COM cable
- Manual
- CD
- 1x SATA cable
- I/O shield
- 1x IDE cable